




# FSK Tape

## Construction

Substrate: FSK (Foil Scrim Kraft)  
 Adhesive: Solvent Acrylic  
 Liner: 60-lb Silicone Coated Kraft

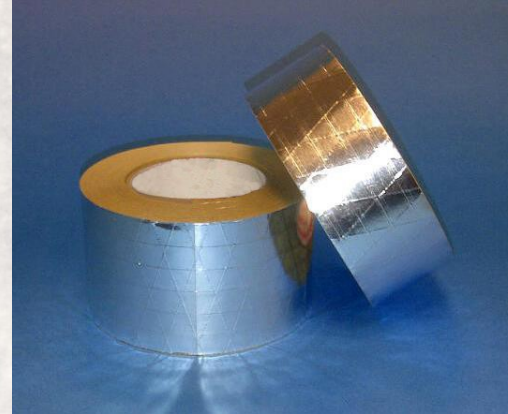

## Features

An aggressive all-weather acrylic adhesive system  
 Bonds tightly and permanently to insulation facing and HVAC ducts  
 Performs well over a wide range of environmental conditions  
 UL Listed (File# R27953)

## Application

Application surface must be clean, dry and free of contaminants. Apply pressure with plastic squeegee.

## Shelf Life & Storage

Under ideal storage conditions of 60 F to 80 F and low humidity, shelf life is one year from date of purchase.

## LEED®

US Green Building Council — LEED® Green Building Rating System for New Construction and Major Renovations, v 2.2 Indoor Environmental Quality. Contributes towards EQ Credit 4.1 (low Emitting Materials, Adhesives and Sealants). 1-point. For more information on LEED® and LEED® submittals please visit [www.usgbc.org/leed](http://www.usgbc.org/leed). Individual products are not LEED® certified; LEED® requirements consider material performance in aggregate.

## Performance Data

Test	Typical Values (English)	Typical Values (metric)	Test Method
Total Thickness without Liner	0.0065-in	0.1651-mm	PSTC-133
Peel Adhesion to Stainless Steel	60-oz/in	6.6-N/cm	PSTC-101
Tensile Strength	40-lbs/in	70-N/cm	PSTC-131
Elongation	2%	2%	PSTC-131
Permeance	0.0	0.0	ASTM E 96
Minimum Application Temperature	-25 F	-32 C	Mfg. Internal
Surface Burning Characteristics	0 Flame 0 Smoke	0 Flame 0 Smoke	UL 723 ASTM E 84

## Availability Packaging

Roll Width	Roll Length	Rolls/Carton	Cartons/Pallet
2-in	150-ft	24	27
3-in	150-ft	16	27
4-in	150-ft	12	27



Performance values and characteristics shown are obtained through recommended test procedures. The listed values do not represent a guarantee of product performance. Values represent nominal and average values; individuals roll values may vary from average values indicated on the data sheet. User is responsible for determining suitability and fitness for use.



1650 Manheim Pike, Suite 202  
Lancaster, Pa 17601-3088  
Ph: 800-788-7764  
Fax: 717-519-4046  
Web: [www.spi-co.com](http://www.spi-co.com)  
[www.winroc.com](http://www.winroc.com)



*Please ask your Sales Representative about our other products and services.*